# CB425A-HCQ-DP

B-Qube

## Self-contained ice maker - Sprayer system
## Daily production up to 54 kg

Brema's new Green Tech CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 23g which rapidly chill and enhance the appearance of any beverage.

The Brema CB425A-HCQ-DP is a free-standing ice cube machine that produces 48kg of ice per 24 hours and has storage capacity of 25kg.

The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.




## Features


- Resistant and crystal square cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C rated
- Adjustable Stainless Steel feet
- Removable and cleanable antiscale filter
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard voltages
- HFC Free
- R290 environmentally friendly refridgerant
- Automatic Washing System
- Built in drain pump
- 25kg storage capacity
- Produces 23g square ice cubes

## Options


- 65-85mm feet

## Accessories

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- Adjustable stainless steel legs (4)



Green Tech Design



Side openings for better ventilation




Double water inlet
(W models only)



Plug-in electrical connection

## Ice cube size



Cube 23 grams
Dimensions H 31.5 x L 32.5

## Production 24h

| Air temp. | Water temp. | kg |
|---|---|---|
| 10° C | 7° C | 54 |
| 21° C | 15° C | 48 |
| 32° C | 21° C | 36 |

**3 Years Warranty**

## Certifications available for this model

comcater

www.comcater.com.au contactus@comcater.com.au




B-Qube

# CB425A-HCQ-DP

BREMA Ice Makers

## Self-contained ice maker - Sprayer system
## Daily production up to 54 kg

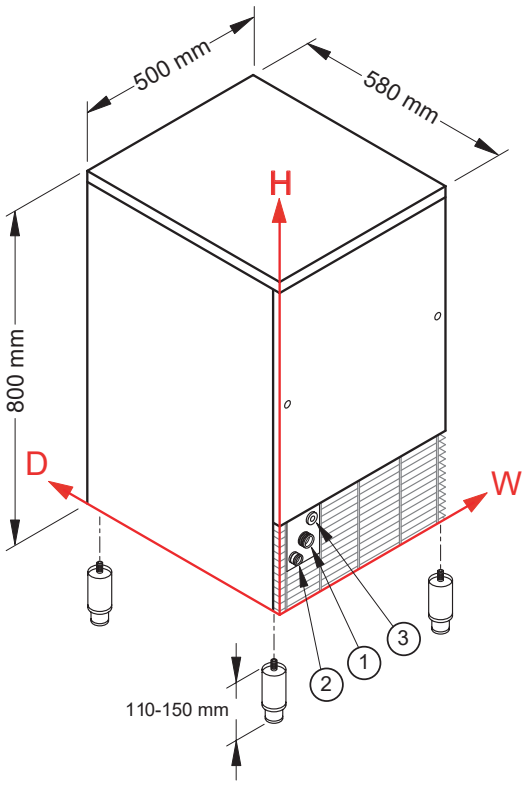



## Working conditions

- Location: **Indoor**

| | Min | Max |
|---|---|---|
| Ambient temperature | +10°C | +43°C |
| Water temperature | +3°C | +32°C |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

## Integrated drain pump benefits

- Reduced installation costs with the ability to position the ice maker up to 4 meters away from a drain.
- Plug and play easy installation makes setting up your ice maker quicker and easier.
- Superior hygiene as excess water is moved out of the ice maker, creating a more sanitary environment.
- The drain pump continues to work in the event of a power black out, reducing water complications.
- Advanced air pressure sensors remove scale build up, reducing maintenance and servicing needs.

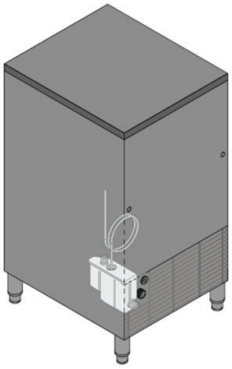

## Connections

All measures are referred to the rear bottom-left corner (W-H-Ø)

(1) Water in.: 111mm - 196mm - 3/4”
(2) Water out.: 49mm - 151mm - 24mm - 3/4”
(3) Electrical connections.: 156mm - 232mm
(4) Cond. water in.: 119mm - 181mm - 3/4”
(4) Only for water cooling systems

## Technical Information

| | |
|---|---|
| Production in 24h | 48kg |
| Store capacity, up to | 25kg |
| Cooling system | A |
| Kind of cube | Q-23g |
| Refrigerant | R290 |
| Standard voltage | 240V - 50 Hz - 10A (lead with plug supplied) |

| | |
|---|---|
| Finish | AISI 304 stainless steel, scotch brite |
| Clearance | 100mm sides + back |
| Water consumption | A: 3 l/kg |
| Sizes (W-D-H) | 497 - 592 - 797 |
| Sizes with pack (W-D-H) | 550 - 660 - 970 |
| Net weight | 46kg |
| Gross weight | 54kg |
| Power consumption* | 450W |
| Electrical consumption | 18 kWh/100kg |

All the technical information need to be considered at the following conditions:
Sizes without feet
Standard Cube (23 g)
Ambient temperature +21°C
Water temperature +15°C
Electrical consumption at +32°C (standard voltage)
*Average power consumption at +43°C (standard voltage)

**Models and specifications are subject to change without notice**

comcater
www.comcater.com.au
contactus@comcater.com.au