CB955A-HCQ-DP

B-Qube

Self-contained ice maker - Sprayer system
Daily production up to 90 kg

Brema's new Green Tech CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 23g which rapidly chill and enhance the appearance of any beverage.

The Brema CB955A-HCQ-DP is a free-standing ice cube machine that produces 95kg of ice per 24 hours and has storage capacity of 55kg.

The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.




Features


- Resistant and crystal square cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C rated
- Adjustable Stainless Steel feet
- Removable and cleanable antiscale filter
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard voltages
- HFC Free
- R290 environmentally friendly refridgerant
- Automatic Washing System
- Built in drain pump
- 55kg storage capacity
- Produces 23g square ice cubes

Accessories

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- Adjustable stainless steel legs (4)



Green Tech Design



Side openings for better ventilation




Double water inlet
(W models only)



Plug-in electrical connection

Ice cube size



Cube 23 grams
Dimensions H 31.5 x L 32.5

Production 24h

Air temp.	Water temp.	kg
10° C	7° C	90
21° C	15° C	85
32° C	21° C	80

3 Years Warranty

Certifications available for this model

comcater

www.comcater.com.au contactus@comcater.com.au




B-Qube

CB955A-HCQ-DP

BREMA Ice Makers

Self-contained ice maker - Sprayer system
Daily production up to 90 kg

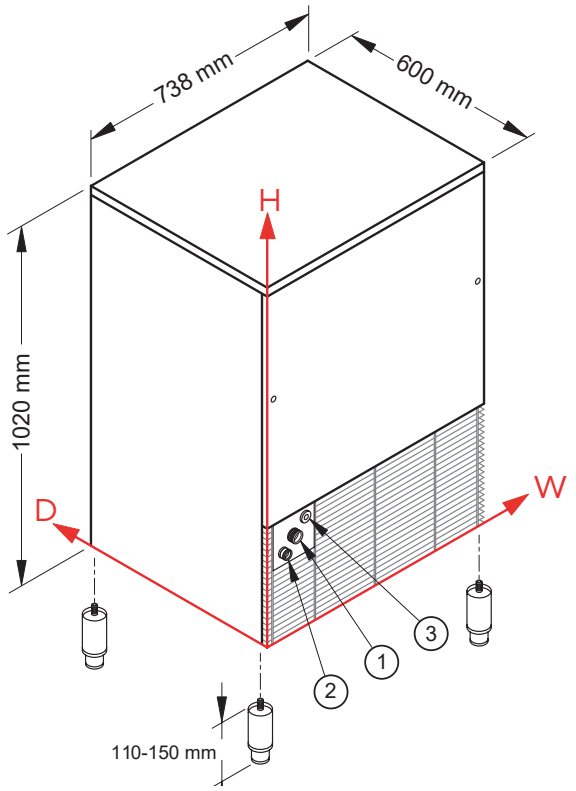


Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10°C	+43°C
Water temperature	+3°C	+32°C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Integrated drain pump benefits

- Reduced installation costs with the ability to position the ice maker up to 4 meters away from a drain.
- Plug and play easy installation makes setting up your ice maker quicker and easier.
- Superior hygiene as excess water is moved out of the ice maker, creating a more sanitary environment.
- The drain pump continues to work in the event of a power black out, reducing water complications.
- Advanced air pressure sensors remove scale build up, reducing maintenance and servicing needs.

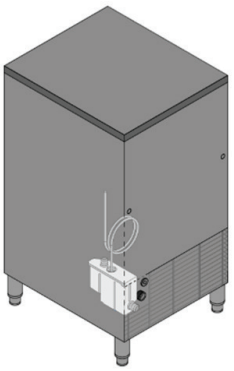

Connections

All measures are referred to the rear bottom-left corner (W-H-Ø)

(1) Water in.: 135mm - 237mm - 3/4”
(2) Water out.: 62mm - 242mm - 24mm
(3) Electrical connections.: 100mm - 312mm
(4) Cond. water in.: 98mm - 177mm - 3/4”
(4) Only for water cooling systems

Technical Information

Production in 24h	90kg
Store capacity, up to	55kg
Cooling system	A
Kind of cube	Q-23g
Refrigerant	R290
Standard voltage	240V - 50 Hz - 10A (lead with plug supplied)

Finish	AISI 304 stainless steel, scotch brite
Clearance	100mm sides + back
Water consumption	A: 2.3 l/kg
Sizes (W-D-H)	735 - 603 - 1010
Sizes with pack (W-D-H)	780 - 640 - 1185
Net weight	74kg
Gross weight	86kg
Power consumption*	870W
Electrical consumption	25 kWh/100kg

All the technical information need to be considered at the following conditions:
Sizes without feet
Standard Cube (23 g)
Ambient temperature +21°C
Water temperature +15°C
Electrical consumption at +32°C (standard voltage)
*Average power consumption at +43°C (standard voltage)

Models and specifications are subject to change without notice

comcater

www.comcater.com.au contactus@comcater.com.au